


# CR1V PB02 SERIES

## Current Sensor

### Model Number:

CR1V 6 PB02  
CR1V 15 PB02  
CR1V 25 PB02

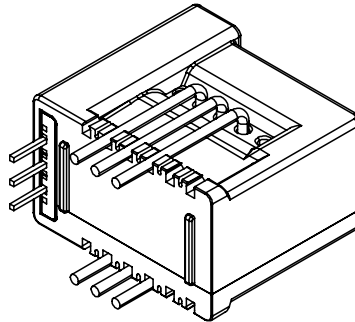

For the electronic measurement of current:DC,AC,pulsed...,with galvanic separation between the primary and the secondary circuit.

### Features

- ✧ Closed loop (compensated) current sensor using the Hall effect
- ✧ Supply voltage: 3.3V
- ✧ Galvanic separation between primary and secondary
- ✧ Insulating plastic case recognized according to UL 94-V0
- ✧ Very good linearity
- ✧ High accuracy
- ✧ Very low offset drift over temperature
- ✧ No insertion losses
- ✧ Standards:
  - IEC 60664-1:2020
  - IEC 61800-5-1:2022
  - IEC 62109-1:2010

### Applications

- ✧ AC variable speed and servo motor drives
- ✧ Uninterruptible Power Supply (UPS)
- ✧ Static converters for DC motor drives
- ✧ Switch Mode Power Supplies (SMPS)
- ✧ Power supply for welding applications
- ✧ Battery Management
- ✧ Wind energy inverter
- ✧ Test and detection devices

## Safety

The sensor must be used according to IEC 61800-5-1.

The sensor must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the following manufacture's operating instructions.

**Caution, risk of electrical shock !**



When operating the sensor, certain parts of the module can carry hazardous voltage (e.g., Primary busbar, power supply).

Ignore this warning can lead to injury and/or cause serious damage.

This sensor is a built-in device, whose conducting parts must be inaccessible after installation. A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

# CR1V PB02 SERIES

## Absolute maximum ratings(not operating)

Parameter	Symbol	Unit	Value
Supply voltage	$V_c$	V	4

※ Stresses above these ratings may cause permanent damage.

※ Exposure to absolute maximum ratings for extended periods may degrade reliability

## Environmental and mechanical characteristics

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Ambient operating temperature	$T_A$	°C	-40		85	
Ambient storage temperature	$T_S$	°C	-40		125	
Mass	$m$	g		10		

## Insulation coordination

Parameter	Symbol	Unit	Value	Comment
Rms voltage for AC insulation test @50Hz, 1min	$V_d$	kV	3	According to IEC 60664-1
Impulse withstand voltage 1.2/50μs	$V_W$	kV	8	According to IEC 60664-1
Insulation resistance	$R_{IS}$	MΩ	1500	@500V, $T_A=25^{\circ}\text{C}$
Clearance(Pri.-sec.)	$d_{cl}$	mm	6.35	
Creepage distance(Pri.-sec.)	$d_{cp}$	mm	15.5	
Plastic case	-	-	UL94-V0	
Comparative tracking index	$CTI$	PLC	3	
Application example	-	-	300V	Reinforced insulation, according to IEC 61800-5-1, IEC 62109-1CATⅢ, PD2
Application example	-	-	600V	Basic insulation, according to IEC 61800-5-1, IEC 62109-1CATⅢ, PD2

# CR1V PB02 SERIES

## Electrical data

### CR1V 6 PB02

※ With  $T_A = 25^\circ\text{C}$ ,  $V_C = 3.3\text{V}$ ,  $R_L = 2\text{k}\Omega$ , unless otherwise noted.

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal rms current	$I_{PN}$	At		$\pm 6$		
Maximum measuring current	$I_{PM}$	At	-12		12	
Turns ratio	$K_N$	-	1-2-3:1152			
Internal sampling resistance (0.1%)	$R_{IM}$	$\Omega$		30		
Theoretical sensitivity	$G_{th}$	mV/A		104.17		@ $V_C=3.3\text{V}$
Load resistance	$R_L$	k $\Omega$	2			
Current consumption	$I_C$	mA	$15 + I_P/N_S$			
Supply voltage	$V_C$	V		3.3		@ $\pm 5\%$
Output voltage	$V_O$	V	$1.65 \pm (0.625 * I_P / I_{PN})$			
Offset voltage @ $I_P=0\text{A}$	$V_{OE}$	mV	1633	1650	1665	
Temperature drift of offset voltage	$TCV_{OE}$	mV/ $^\circ\text{C}$	-0.05		0.05	@ $-40^\circ\text{C} \sim 85^\circ\text{C}$
Sensitivity error	$\mathcal{E}_G$	%	-0.3		0.3	Exclusive of $V_{OE}$
Temperature of G	$TCG$	%/ $^\circ\text{C}$	-0.05		0.05	@ $-40^\circ\text{C} \sim 85^\circ\text{C}$
Hysteresis offset voltage @ $I_P=0$ after $2 \times I_{PN}$	$V_M$	mV	-1	$\pm 0.5$	1	
Linearity error	$\mathcal{E}_L$	% of $I_{PN}$	-0.1		0.1	Exclusive of $V_{OE}$
Accuracy @ $I_{PN}$	$X$	% of $I_{PN}$	-0.4		0.4	Exclusive of $V_{OE}$
Response time @ 90% of $I_{PN}$	$t_r$	ns			500	@ $di/dt=50\text{A/s}$
Frequency bandwidth(-3dB)	$BW$	kHz	200			

# CR1V PB02 SERIES

## Electrical data

### CR1V 15 PB02

※ With  $T_A = 25^\circ\text{C}$ ,  $V_C = 3.3\text{V}$ ,  $R_L = 2\text{k}\Omega$ , unless otherwise noted.

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal rms current	$I_{PN}$	At		$\pm 15$		
Maximum measured current	$I_{PM}$	At	-30		30	
Turns ratio	$K_N$	-	1-2-3:1440			
Internal sampling resistance (0.1%)	$R_{IM}$	$\Omega$		15		
Theoretical sensitivity	$G_{th}$	mV/A		41.66		@ $V_C=3.3\text{V}$
Load resistance	$R_L$	k $\Omega$	2			
Current consumption	$I_C$	mA	$15 + I_P/N_S$			
Supply voltage	$V_C$	V		3.3		@ $\pm 5\%$
Output voltage	$V_O$	V	$1.65 \pm (0.625 * I_P / I_{PN})$			
Offset voltage@ $I_P=0\text{A}$	$V_{OE}$	mV	1633	1650	1665	
Temperature drift of offset voltage	$TCV_{OE}$	mV/ $^\circ\text{C}$	-0.05		0.05	@ $-40^\circ\text{C} \sim 85^\circ\text{C}$
Sensitivity error	$\varepsilon_G$	%	-0.3		0.3	Exclusive of $V_{OE}$
Temperature of G	$TCG$	%/ $^\circ\text{C}$	-0.05		0.05	@ $-40^\circ\text{C} \sim 85^\circ\text{C}$
Hysteresis offset voltage@ $I_P=0$ after $2 \times I_{PN}$	$V_M$	mV	-1	$\pm 0.5$	1	
Linearity error	$\varepsilon_L$	% of $I_{PN}$	-0.1		0.1	Exclusive of $V_{OE}$
Accuracy@ $I_{PN}$	$X$	% of $I_{PN}$	-0.4		0.4	Exclusive of $V_{OE}$
Response time @ 90% of $I_{PN}$	$t_r$	ns			500	@ $di/dt=50\text{A/s}$
Frequency bandwidth (-3dB)	$BW$	kHz	200			

# CR1V PB02 SERIES

## Electrical data


### CR1V 25 PB02

※ With  $T_A = 25^\circ\text{C}$ ,  $V_C = 3.3\text{V}$ ,  $R_L = 2\text{k}\Omega$ , unless otherwise noted.

Parameter	Symbol	Unit	Max	Typ	Max	Comment
Primary nominal rms current	$I_{PN}$	At		$\pm 25$		
Maximum measured current	$I_{PM}$	At	-50		50	
Turns ratio	$K_N$	-	1-2-3:1200			
Internal sampling resistance (0.1%)	$R_{IM}$	$\Omega$		7.5		
Theoretical sensitivity	$G_{th}$	mV/A		25		@ $V_C = 3.3\text{V}$
Load resistance	$R_L$	k $\Omega$	2			
Current consumption	$I_C$	mA	$15 + I_P/N_S$			
Supply voltage	$V_C$	V		3.3		@ $\pm 5\%$
Output voltage	$V_O$	V	$1.65 \pm (0.625 * I_P / I_{PN})$			
Offset voltage @ $I_P = 0\text{A}$	$V_{OE}$	mV	1633	1650	1665	
Temperature drift of offset voltage	$TCV_{OE}$	mV/ $^\circ\text{C}$	-0.05		0.05	@ $-40^\circ\text{C} \sim 85^\circ\text{C}$
Sensitivity error	$\mathcal{E}_G$	%	-0.3		0.3	Exclusive of $V_{OE}$
Temperature of G	$TCG$	%/ $^\circ\text{C}$	-0.05		0.05	@ $-40^\circ\text{C} \sim 85^\circ\text{C}$
Hysteresis offset voltage @ $I_P = 0$ after $2 \times I_{PN}$	$V_M$	mV	-1	$\pm 0.5$	1	
Linearity error	$\mathcal{E}_L$	% of $I_{PN}$	-0.1		0.1	Exclusive of $V_{OE}$
Accuracy @ $I_{PN}$	$X$	% of $I_{PN}$	-0.4		0.4	Exclusive of $V_{OE}$
Response time @ 90% of $I_{PN}$	$t_r$	ns			500	@ $di/dt = 50\text{A/s}$
Frequency bandwidth (-3dB)	$BW$	kHz	200			

# CR1V PB02 SERIES

Dimensions (in mm. 1 mm = 0.0394 inch)

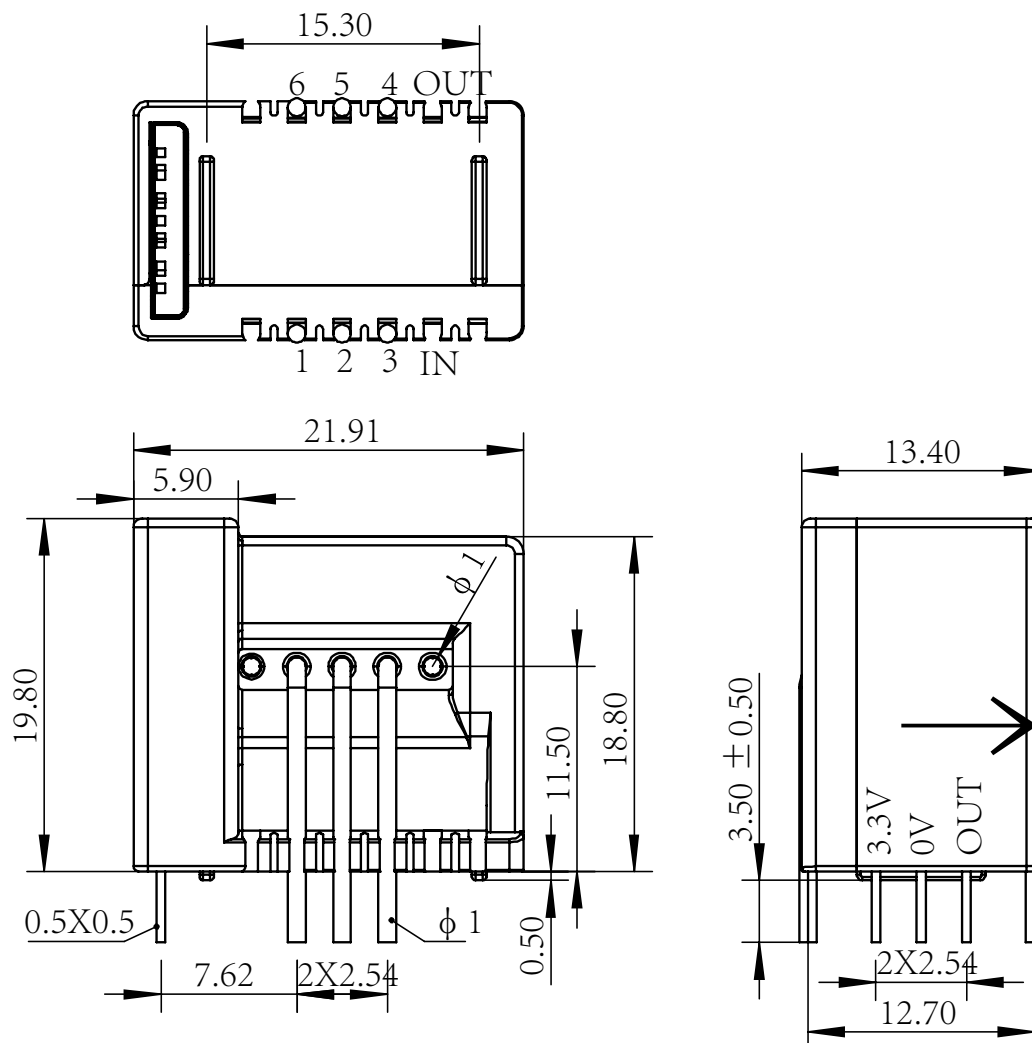

## Mechanical characteristics

- ✧ General tolerance  $\pm 0.3$  mm
- ✧ Connection of primary pin 6 pins 0.8×0.8mm
- ✧ Connection of secondary pin 3 pins 0.3×0.5mm

## Remarks

- ✧  $I_S$  is positive when the measured electric current flows from 1,2,3 to 4,5,6.

This is a standard model. For different applications (measurement, secondary connections...), please contact CHIPSENSE.