


## Voltage Sensor

### Model Number:

VN2A 1100 PB20



For the electronic measurement of voltage: DC, AC, pulsed..., with galvanic separation between the primary and the secondary circuit.

### Features

- ✧ Closed loop (compensated) voltage sensor using the Hall Effect
- ✧ Insulating plastic case recognized according to UL94-V0
- ✧ Small size
- ✧ High accuracy
- ✧ Very good linearity
- ✧ Very low offset drift over temperature
- ✧ Standards:
  - IEC 60664-1:2020
  - IEC 61800-5-1:2022
  - IEC 62109-1:2010

### Applications

- ✧ AC variable speed
- ✧ Uninterruptible Power Supplies (UPS)
- ✧ Static converters for DC motor drives
- ✧ Switch Mode Power Supplies (SMPS)
- ✧ Power supplies for welding applications

## Safety

This sensor must be used according to IEC 61800-5-1.

This sensor must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacture's operating instructions.

**Caution, risk of electrical shock!**



When operating the sensor, certain parts of the module can carry hazardous voltage (e.g. Primary busbar, power supply). Ignoring this warning can lead to injury and/or cause serious damage.

This sensor is a built-in device, whose conducting parts must be inaccessible after installation. A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

## Absolute maximum ratings(not operating)

Parameter	Symbol	Unit	Value
Supply voltage	$V_c$	V	±18

- ※ Stresses above these ratings may cause permanent damage.
- ※ Exposure to absolute maximum ratings for extended periods may degrade reliability.

## Environmental and mechanical characteristics

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Ambient operating temperature	$T_A$	°C	-40		85	
Ambient storage temperature	$T_S$	°C	-45		100	
Mass	$m$	g		48		

## Insulation coordination

Parameter	Symbol	Unit	Value	Comment
Rms voltage for AC insulation test @ 50Hz, 1min	$V_d$	kV	4.1	According to IEC 60664-1
Plastic case	-	-	UL94-V0	
Comparative tracking index	$CTI$	PLC	3	
Application example	-	-	600V	Reinforced insulation, according to IEC 61800-5-1, IEC 62109-1CAT III, PD2
Application example	-	-	1500V	Basic insulation, according to IEC 61800-5-1, IEC 62109-1CAT III, PD2

# VN2A 1100 PB20


## Electrical data

※ With  $T_A = 25^\circ\text{C}$ ,  $V_C = \pm 12\text{V}$ ,  $R_L = 100\Omega$ , unless otherwise noted.

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal rms voltage	$V_{PN}$	V		$\pm 1100$		
Measuring resistance	$R_M$	$\Omega$	30		210	@ $\pm 12\text{V}$ , $\pm 1100\text{V}$
Output nominal rms current	$I_{SN}$	mA		25		
Supply voltage	$V_C$	V		$\pm 12$		@ $\pm 5\%$
Primary coil resistance	$R_P$	$\Omega$		250		@ $25^\circ\text{C}$
Secondary coil resistance	$R_S$	$\Omega$			117	@ $85^\circ\text{C}$
Conversion ratio	$K_N$	-		1100V:25mA		
Coil turn ratio	$N_P / N_S$	-		2500:1000		
Current consumption	$I_C$	mA		$10 + I_S$		
Electrical offset current	$I_0$	mA	-0.15		0.15	
Thermal drift of offset current	$I_{0T}$	mA	-0.5	$\pm 0.1$	0.5	@ $-25^\circ\text{C} \sim 85^\circ\text{C}$
			-0.8	$\pm 0.1$	0.8	@ $-40^\circ\text{C} \sim 85^\circ\text{C}$
Sensitivity error	$\mathcal{E}_G$	%	-0.4		0.4	
Linearity error	$\mathcal{E}_L$	% of $I_{PN}$	-0.2		0.2	
Accuracy@ $I_{PN}$	$X$	% of $I_{PN}$	-0.6		0.6	
Response time@ 90% of $I_{PN}$	$t_r$	$\mu\text{s}$		25		

# VN2A 1100 PB20

## Dimensions(Unit mm)

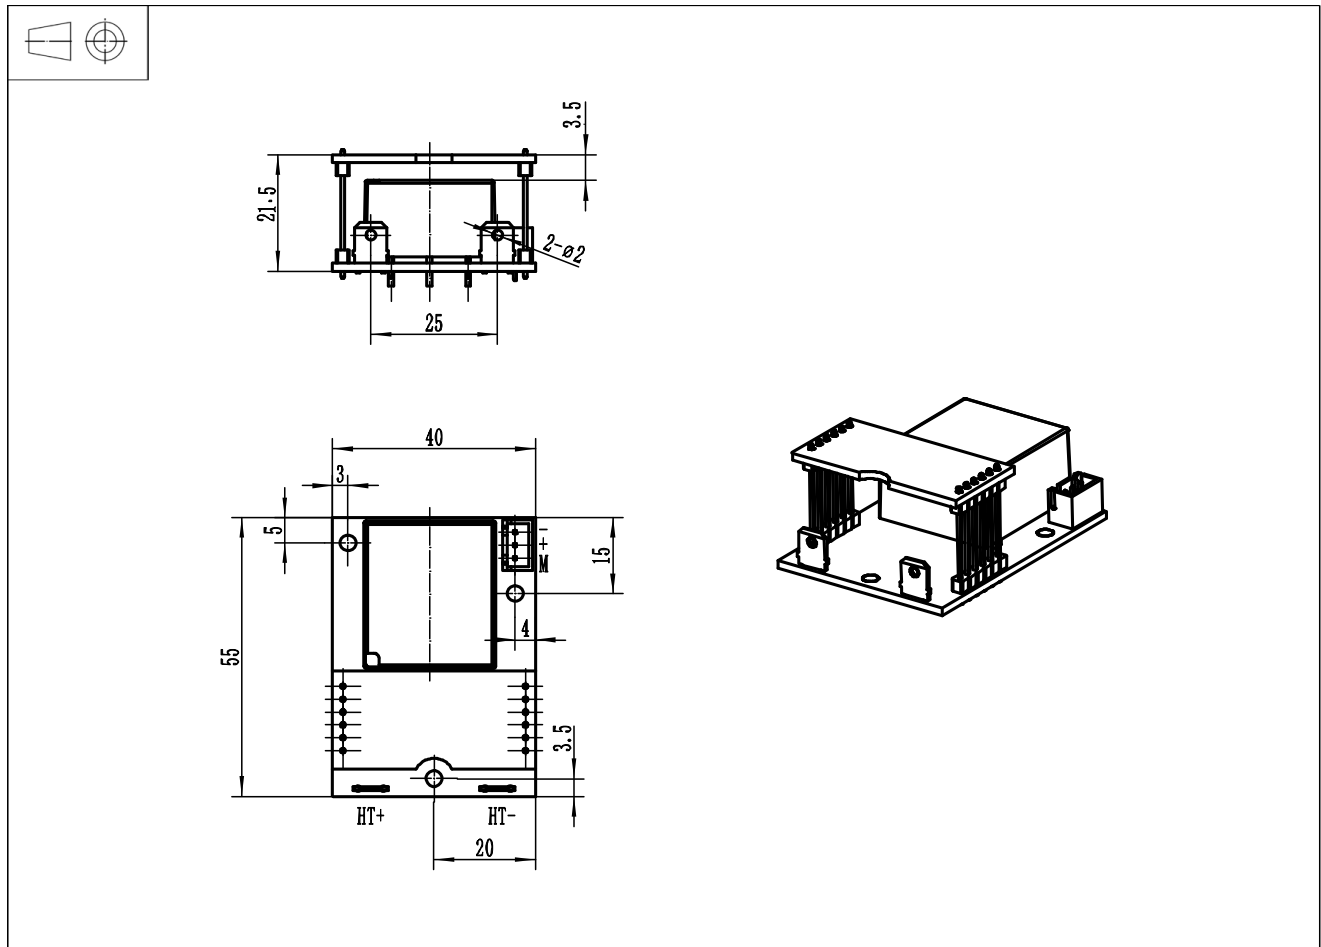

## Mechanical characteristic

- ◇ General tolerance  $\pm 0.3$  mm
- ◇ Sensor 3pc  $\Phi 3.2$  mm through hole
- ◇ Primary connection 2pc Faston 6.3×0.8mm
- ◇ Connection of secondary XH-3A

## Remarks

- ◇  $I_S$  is positive when  $V_P$  is connected to +HV.
- ◇ The primary side and the voltage under test must be securely connected.