

Current sensor

Model Number:

FR1C 300 H1352B

FR1C 500 H1352B

FR1C 700 H1352B




This sensor features electrical isolation between its primary (high-voltage) and secondary (12V system) circuits, making it suitable for battery monitoring applications requiring high accuracy and low offset.

Features

- ✧ Current sensor using Fluxgate technology
- ✧ Over-current detection mechanism
- ✧ Unipolar +12V battery power supply
- ✧ Output signal: High speed CAN (500Kbps)
- ✧ Configurable internal digital low-pass frequency filter
- ✧ Configurable CAN speed/CAN ID
- ✧ Ingress Protection: IP42
- ✧ Housing material complies with UL 94-V0
- ✧ Standards:
 - IEC 60664-1:2020
 - IEC 61800-5-1:2022
 - IEC 62109-1:2010

Working principle

A low-frequency fluxgate current sensor is made of a wound core which saturates under low induction. A current chopper switches the winding's current to saturate the magnetic core alternatively at $\pm B_{max}$ with a fixed frequency. Fluxgate sensors use the change of the saturation's point symmetry to measure the primary current. Due to the principle of switching the current, all offsets (electric and magnetic) are canceled.

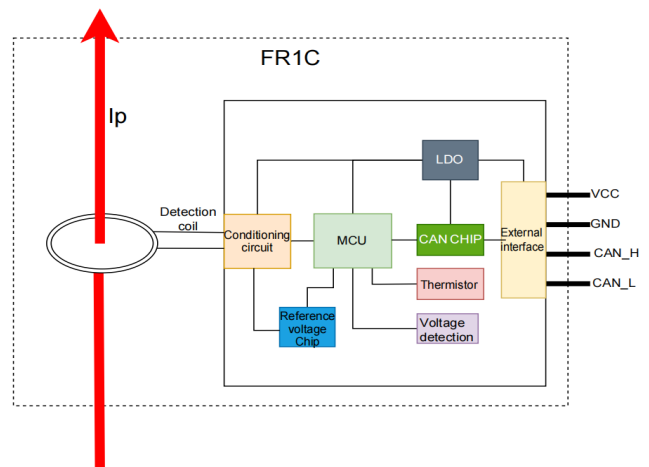

Applications

- ✧ Hybrid and electric vehicle battery pack
- ✧ Conventional lead-acid batteries
- ✧ Battery management

Safety

The use of sensors must comply with the IEC 61800-5-1 standards.

Sensors must be placed in electronic or electrical equipment that meets application standards and safety requirements according to the instructions.


Caution, risk of electrical shock!



When sensors are working, certain parts may be subjected to dangerous voltages (such as the primary busbar and power supply), ignoring these can lead to damage and serious danger.

Sensors are built-in devices, and after installation, their conductive parts must be ensured not to be touched by the outside world. If necessary, a protective shell or shielding cover can be added. The main power supply must be able to be disconnected.

Product Naming Rules

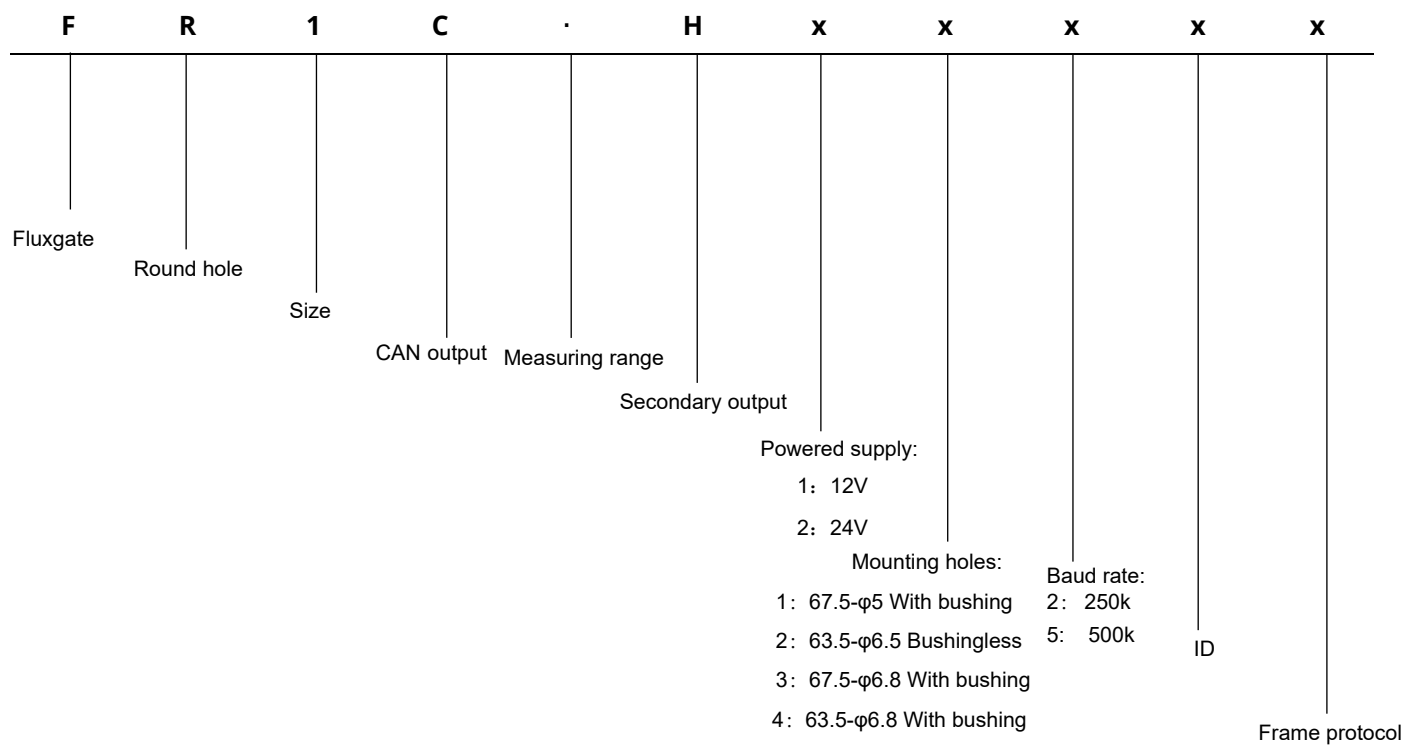

Model Selection Example

F	R	1	C	300	H	1	3	5	2	B
Fluxgate	Round hole	Size	CAN Output	Measuring range	Secondary output	12V	67.5-φ6.8 With bushing	500k	0x3C2	CHIPSENSE Code

* The above are merely examples for model selection; please contact CHIPSENSE for other customization requirements.

Absolute maximum ratings (not operating)

Parameter	Symbol	Unit	Value
Supply voltage	V_C	V	+16
Primary conductor temperature	T_B	°C	100

✘ Using beyond the above limits may cause permanent damage to the sensor.

Environmental and mechanical characteristics

Parameter	Symbol	Unit	Min	Typical	Max	Comment
Ambient operating temperature	T_A	°C	-40		85	
Ambient storage temperature	T_S	°C	-45		105	
Mass	m	g		68		

✘ Long term exposure to the above limit environment may reduce the reliability of the product.

Insulation coordination

Parameter	Symbol	Unit	Value	Comment
Rms voltage for AC insulation test @50Hz, 1min	V_d	kV	7.8	According to IEC 60664-1
Impulse withstand voltage 1.2/50μs	V_W	kV	14.5	According to IEC 60664-1
Clearance (pri.- sec.)	d_{Cl}	mm	31.5	
Creepage distance (pri.- sec.)	d_{Cp}	mm	42.5	
Comparative tracking index	CTI	PLC	Group II	
Insulation resistance	R_{INS}	MΩ	500	@500 V - ISO 16750-2
Application example	-	-	1500V	Reinforced insulation, according to IEC 61800-5-1, IEC 62109-1CATIII, PD2
Application example	-	-	3000V	Basic insulation, according to IEC 61800-5-1, IEC 62109-1CATIII, PD2

Electrical data

FR1C 300 H1352B

※ With $T_A = 25^\circ\text{C}$, $V_C = +12\text{V}$, unless otherwise noted.

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal RMS current	I_{PN}	A		± 300		DC
Primary current measuring range	I_{PM}	A	-400		400	DC
Supply voltage	V_C	V	8	12 ¹⁾	16	
Current consumption	I_C	mA		46 82		@ $I_P=0\text{A}$ @ $I_P=300\text{A}$
Sensitivity error	ε_G	%	-0.5		0.5	
Temperature of G	TCG	%/K	-0.05		0.05	@ $-40^\circ\text{C} \sim 85^\circ\text{C}$
Offset current	I_{OE}	mA	-10		10	
Linearity error 0... I_{PN}	ε_L	%	-0.1		0.1	
Accuracy@ I_{PN}	X	% of I_{PN}	-0.3 -0.5		0.3 0.5	@ 25°C Exclusive I_{OE} @ $-40^\circ\text{C} \sim 85^\circ\text{C}$ Exclusive I_{OE}
Output noise		mA	-10		10	
Output frequency of CAN signal ²⁾		Hz		100		Depends on the filter implemented
Start-up time		ms		150		
Setting time after overload		ms		20		

Notes: 1) For the classical 12V Lead-acid battery system, the mean value of battery voltage becomes to 13.5V during charging

2) Output frequency depends on the emission period of the frame without digital filter.

Electrical data

FR1C 500 H1352B

※ With $T_A = 25^\circ\text{C}$, $V_C = +12\text{V}$, unless otherwise noted.

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal RMS current	I_{PN}	A		± 500		DC
Primary current measuring range	I_{PM}	A	-530		530	DC
Supply voltage	V_C	V	8	12 ¹⁾	16	
Current consumption	I_C	mA		46 150		@ $I_P=0\text{A}$ @ $I_P=500\text{A}$
Sensitivity error	$\mathcal{E}_G$	%	-0.5		0.5	
Temperature of G	TCG	%/K	-0.05		0.05	@ $-40^\circ\text{C} \sim 85^\circ\text{C}$
Offset current	I_{OE}	mA	-10		10	
Linearity error 0... I_{PN}	$\mathcal{E}_L$	%	-0.1		0.1	
Accuracy@ I_{PN}	X	% of I_{PN}	-0.3 -0.5		0.3 0.5	@ 25°C Exclusive I_{OE} @ $-40^\circ\text{C} \sim 85^\circ\text{C}$ Exclusive I_{OE}
Output noise		mA	-10		10	
Output frequency of CAN signal ²⁾		Hz		100		Depends on the filter implemented
Start-up time		ms		150		
Setting time after overload		ms		20		

Notes: 1) For the classical 12V Lead-acid battery system, the mean value of battery voltage becomes to 13.5V during charging

2) Output frequency depends on the emission period of the frame without digital filter.

Electrical data

FR1C 700 H1352B

※ With $T_A = 25^\circ\text{C}$, $V_C = +12\text{V}$, unless otherwise noted.

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal RMS current	I_{PN}	A		± 700		DC
Primary current measuring range	I_{PM}	A	-760		760	DC
Supply voltage	V_C	V	8	12 ¹⁾	16	
Current consumption	I_C	mA		46 220		@ $I_P=0\text{A}$ @ $I_P=700\text{A}$
Sensitivity error	$\mathcal{E}_G$	%	-0.5		0.5	
Temperature of G	TCG	%/K	-0.05		0.05	@ $-40^\circ\text{C} \sim 85^\circ\text{C}$
Offset current	I_{OE}	mA	-10		10	
Linearity error 0... I_{PN}	$\mathcal{E}_L$	%	-0.1		0.1	
Accuracy@ I_{PN}	X	% of I_{PN}	-0.3 -0.5		0.3 0.5	@ 25°C Exclusive I_{OE} @ $-40^\circ\text{C} \sim 85^\circ\text{C}$ Exclusive I_{OE}
Output noise		mA	-10		10	
Output frequency of CAN signal ²⁾		Hz		100		Depends on the filter implemented
Start-up time		ms		150		
Setting time after overload		ms		20		

Notes: 1) For the classical 12V Lead-acid battery system, the mean value of battery voltage becomes to 13.5V during charging

2) Output frequency depends on the emission period of the frame without digital filter.

CAN Output specification

Software Version

Applicable: FR1C 300 H1352B

- CAN protocol 2.0A/B
- Bit order: big endian (Motorola)
- CAN oscillator tolerance: 0.27 %
- No sleep mode capability
- 120Ω termination resistor to be added externally, internal CAN impedance = 4.8kΩ

Message Description	CAN ID	Name	Data Length (Nb bytes)	Type of frame	Message launch type	Signal description	Signal name	Start bit	Length
Return Current I_P (mA)	0x3C2	FR1C_IP	8	Standard	Cyclic message period 10±1 ms	I_P Value: 80000000H=0mA 7FFFFFFFH=-1mA 80000001H=1mA	IP_VALUE	24	31
						Error indication (1 bit) 0 = Normal 1 = Failure	ERROR_INDICATION	32	1
						Error information (7 bits)	ERROR_INFORMATION	33	7
						Reserved	UNDEFINE	40	8
							PCBA Ver	48	8
							FIRMWARE Ver	56	8

Error Management

Failure Mode	I_P Value	Error Indication	Error Information
Overcurrent protection: $I_P > 400A$	0x FFFF FFFF	1	0x41
The fluxgate oscillator frequency is too low	0x FFFF FFFF	1	0x42
Signal unavailable for more than 100ms	0x FFFF FFFF	1	0x44
Power supply anomaly	0x FFFF FFFF	1	0x46
FLASH CRC Checksum Error	0x FFFF FFFF	1	0x48

CAN Output specification

Software Version

Applicable: FR1C 500 H1352B

- CAN protocol 2.0A/B
- Bit order: big endian (Motorola)
- CAN oscillator tolerance: 0.27 %
- No sleep mode capability
- 120Ω termination resistor to be added externally, internal CAN impedance = 4.8kΩ

Message Description	CAN ID	Name	Data Length (Nb bytes)	Type of frame	Message launch type	Signal description	Signal name	Start bit	Length
Return Current <i>I_P</i> (mA)	0x3C2	FR1C_IP	8	Standard	Cyclic message period 10±1 ms	<i>I_P</i> Value: 80000000H=0mA 7FFFFFFFH=-1mA 80000001H=1mA	IP_VALUE	24	32
						Error indication (1 bit) 0 = Normal 1 = Failure	ERROR_INDICATION	32	1
						Error information (7 bits)	ERROR_INFORMATION	33	7
						Reserved	UNDEFINE	40	8
							PCBA Ver	48	8
							FIRMWARE Ver	56	8

Error Management

Failure Mode	<i>I_P</i> Value	Error Indication	Error Information
Overcurrent protection: <i>I_P</i> > 530A	0x FFFF FFFF	1	0x41
The fluxgate oscillator frequency is too low	0x FFFF FFFF	1	0x42
Signal unavailable for more than 100ms	0x FFFF FFFF	1	0x44
Power supply anomaly	0x FFFF FFFF	1	0x46
FLASH CRC Checksum Error	0x FFFF FFFF	1	0x48

CAN Output specification

Software Version

Applicable: FR1C 700 H1352B


- CAN protocol 2.0A/B
- Bit order: big endian (Motorola)
- CAN oscillator tolerance: 0.27%
- No sleep mode capability
- 120Ω termination resistor to be added externally, internal CAN impedance = 4.8kΩ

Message Description	CAN ID	Name	Data Length (Nb bytes)	Type of frame	Message launch type	Signal description	Signal name	Start bit	Length
Return Current I_P (mA)	0x3C2	FR1C_IP	8	Standard	Cyclic message period 10±1 ms	I_P Value: 80000000H=0mA 7FFFFFFFH=-1mA 80000001H=1mA	IP_VALUE	24	32
						Error indication (1 bit) 0 = Normal 1 = Failure	ERROR_INDICATION	32	1
						Error information (7 bits)	ERROR_INFORMATION	33	7
						Reserved	UNDEFINE	40	8
							PCBA Ver	48	8
							FIRMWARE Ver	56	8

Error Management

Failure Mode	I_P Value	Error Indication	Error Information
Overcurrent protection: $I_P > 760A$	0x FFFF FFFF	1	0x41
The fluxgate oscillator frequency is too low	0x FFFF FFFF	1	0x42
Signal unavailable for more than 100ms	0x FFFF FFFF	1	0x44
Power supply anomaly	0x FFFF FFFF	1	0x46
FLASH CRC Checksum Error	0x FFFF FFFF	1	0x48

Dimensions (in mm. 1 mm = 0.0394 inch)

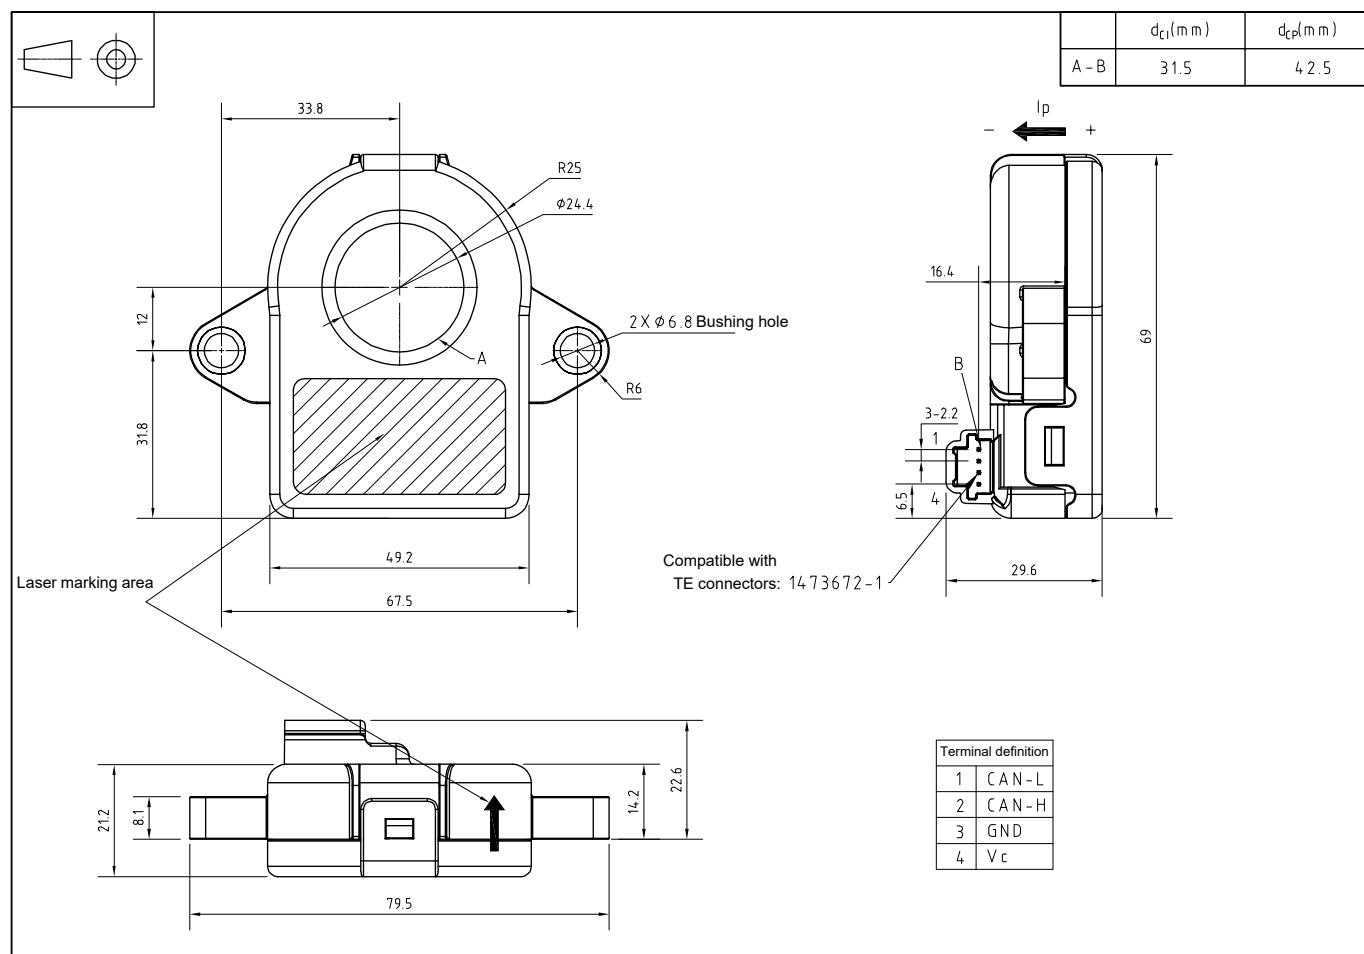

Mechanical characteristics

- | | |
|--|-------------------------|
| ✧ General tolerances | ±0.5mm |
| ✧ Compatible with TE connectors | 1473672-1 |
| ✧ Primary side through-hole dimensions | Φ24.4mm |
| ✧ Sensor mounting holes | Φ6.8mm x 2 |
| ✧ Recommended sensor mounting torque | M6 screw
3 N•m (Max) |
| ✧ Recommended tightening torque | 2.1 N•m(±10%) |

Remarks

- ✧ When I_p flows in the direction of arrow, the voltage output is positive.
- ✧ The primary busbar temperature should not exceed 100°C.
- ✧ The test busbar should be positioned as close to the center of the mounting hole as possible.
- ✧ The sensor should be kept away from strong magnetic fields.